


Standard Lengths: (Other lengths available upon request)

- 01: 304.8 mm ± 12.7 mm
- 02: 609.6 mm ± 12.7 mm
- 03: 914.4 mm ± 12.7 mm
- 04: 1219.2 mm ± 25.4 mm
- 05: 1524.0 mm ± 25.4 mm
- 06: 1828.8 mm ± 25.4 mm
- 07: 2133.6 mm ± 25.4 mm
- 10: 3048.0 mm ± 50.8 mm
- 14: 4267.2 mm ± 50.8 mm
- 15: 4572.0 mm ± 50.8 mm
- 20: 6096.0 mm ± 50.8 mm
- 25: 7620.0 mm ± 50.8 mm
- 35: 10668.0 mm ± 76.2 mm
- 50: 15240.0 mm ± 76.2 mm
- 75: 22860.0 mm ± 76.2 mm
- 100: 30480.0 mm ± 101.6 mm

568B color code PIN OUTS

RJ45 PLUG	WIRE COLOR	RJ45 PLUG
1	WHITE/ORANGE	1
2	ORANGE	2
3	WHITE/GREEN	3
4	BLUE	4
5	WHITE/BLUE	5
6	GREEN	6
7	WHITE/BROWN	7
8	BROWN	8

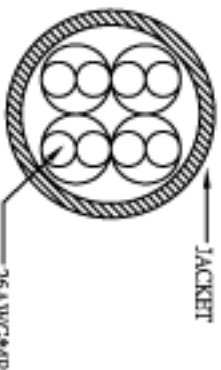

SECTION A-A

26AWG\*4P

NOTES:

CABLE: 26AWG(7/0.18±0.01mm)\*4P

INSULATION: HD-PE OD=Ø1.0±0.05MM

COLOR: BLUE & WHITE/BLUE, ORANGE & WHITE/ORANGE, GREEN & WHITE/GREEN, BROWN & WHITE/BROWN

JACKET: 80°C PVC OD=Ø5.3±0.3MM

JACKET COLOR(Pantone #): BLUE (301U), BLACK (Hexachrome Black C), GRAY (403C), GREEN (3425C), ORANGE (159C), PURPLE (520C), RED (199C), WHITE (White), YELLOW (131C), DARK GRAY (Cool Gray 11C), PINK (7434U)

MARKING\*: ROHS COMPLIANT ENHANCED 350MHZ PATCH CABLE 26AWG 4PR

E175724 9V TYPE CM 60C 30V LL212720 CSA AWM 1 A 80C 30V FT1 UL

Verified to ISO/IEC 11801 AND TIA/EIA 568B-2 CAT 5E at 100 meters TTL

Verified to meet ISO/IEC 11801 AND TIA/EIA 568B-2 CAT 5E at 100 meters

TEST CONDITION: LOW-PRESSURE 15V

INSULATION: UPON 1M ohm AND 1M ohm - ELECTRIC CONDUCTION:INSIDE 1.5kOhm

MOLDED BY 65P PVC . PVC COLOR: to match the cable color

CONNECTOR: RJ45 Short Plug

CABLE: 26AWG\*4P\*1, OD: 5.5mm, JACKET COLOR: as listed above

ITEM NO

PART NAMES

CUSTOMER

DRAWN

CHECKED

VERSION

DRAWN DATE

15 OCT 2006

APPROVERD

J.C.B.

H.J.M.

THREE ANGLE PROJECTION

