


NOTES:

CABLE : 24AWG(7/0.203)*4P(BARE)
 INSULATION : HD-PE OD=Ø 1.05/0.05MM
 COLOR : BLUE&WHITE/BLUE • ORANGE&WHITE/ORANGE
 GREEN&WHITE/GREEN • BROWN&WHITE/BROWN
 JACKET : 80°C PVC OD=Ø 5.5/0.3MM
 JACKET COLOR : BLUE, BLACK, GRAY, GREEN, ORANGE, PINK,
 PURPLE, RED, WHITE, YELLOW
 MARKING : ROHS COMPLIANT ENHANCED 350MHZ PATCH CORD 24AWG 4PR 2835
 E175723 9A AWM 60 30V L1217720 CSA AWM 1A 80°C 30V
 FT1 ETL VERIFIED TO TIA/EIA 568B-2.1 CAT6

THIS PRODUCT MUST BE ROHS COMPLIANT

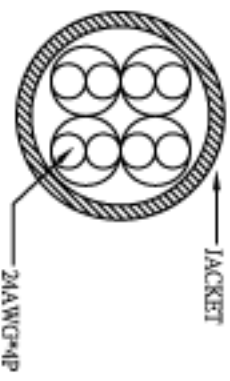

SECTION A-A

568B	PIN OUTS	WIRE COLOR	RJ45 PLUG
1	WHITE/ ORANGE	3	
2	ORANGE	6	
3	WHITE/GREEN	1	
4	BLUE	7	
5	WHITE / BLUE	8	
6	GREEN	2	
7	WHITE / BROWN	4	
8	BROWN	5	

TEST CONDITION: LOW-PRESSURE 15V	ITEM NO	PART	NAMES	QTY
INSULATION: UPON 1M ohm AND 1M ohm - ELECTRIC CONDUCTION:INSIDE 1.5kohm	3		MOLDED BY 65P PVC . PVC COLOR: to be confirmed	
	2		CONNECTOR: RJ45 PLUG	2PCS
	1		CABLE: 24AWG*4P+1.0D: 5.5mm, JACKET COLOR: to be confirmed	1PCS

PRODUCT	RJ45 PLUG TO RJ45 PLUG CAT6 CROSSOVER PATCH CABLE	CUSTOMER	DRAWN	Q.D.D	THREE ANGLE PROJECTION
CUS,NO		VERSION	CHECKED		
DR,NO		DRAWN DATE JUN 16,2005	APPROVERD		

CABLES4SURE.COM